

PANEL MOUNT SOCKETS

DESCRIPTION


The HESCO/RLS sockets incorporate shallow brackets for easy installation. The connectors are also polarized to avoid wrong way insertion. High grade phenolic insulator material ensures impact resistance and high temperature tolerance. Contacts are phosphor bronze with tin plating. Large solder eye enables multiple wire contacts when necessary.




FEATURES

6, 8, and 12 Position Sockets Available
Shallow Bracket
High Grade Phenolic
Voltage: 250V
Maximum Current: 15 Amp

DIMENSIONS

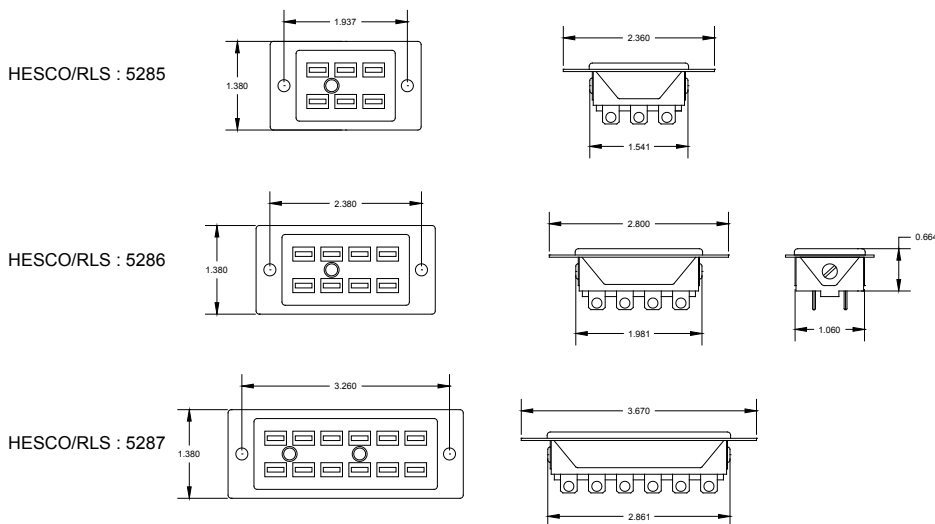

MOUNTING

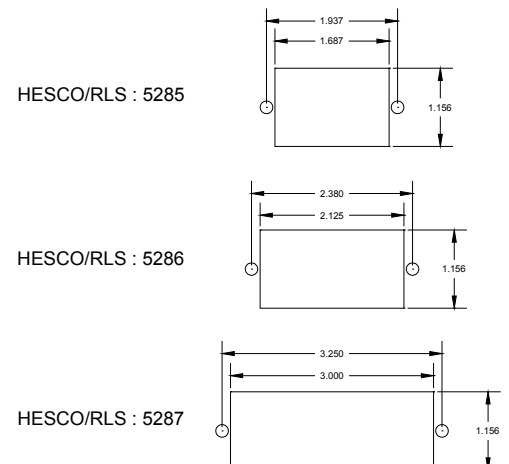

HESCO/RLS

220 Springview Commerce Drive
Unit 190
DeBary, FL 32713

For more information and product support call us at...

1-800-547-4868

www.hescorls.com